

Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Type 1 / Class I / B arrester (lightning current arrester) with arc chopping spark gap and ignition electronics with control lamp, quenching plates for high mains follow-through current quenching capacity, 1-channel. Protection level: 0.9 kV. Housing width: 35 mm (2 Div.)



Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

Commercial Data

Order Key	2818960
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CL1
Catalog Page	Page 17 (TT-2007)
GTIN	4017918168780
Weight per Piece (including packing)	560.1 GRM
Weight per Piece (excluding packing)	514.2 GRM
Customs tariff number	85363030
Country of origin	IN

Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

Technical Data

Product properties

IEC test classification	I
	T1
EN type	T1
Type	DIN rail module, one-piece
Number of positions	1
Surge protection fault message	optical


Electrical properties

Nominal frequency f_N	50 Hz
	60 Hz
Nominal voltage U_N	240 V AC
Nominal voltage U_N	230 V AC ... 277 V AC

Connection data

Connection method	Screw connection
Screw thread	M6
Tightening torque, min	8 Nm
Stripping length	19 mm
Conductor cross section flexible min.	16 mm ²
Conductor cross section flexible max.	35 mm ²
Conductor cross section solid min.	10 mm ²
Conductor cross section solid max.	50 mm ²

Dimensions

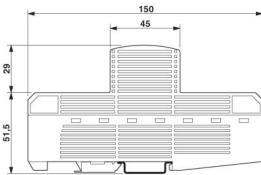Dimensional drawing	
Width	35.5 mm
Height	149.8 mm
Depth	80.5 mm
Horizontal pitch	2 Div.

Material specifications

Color	black
Flammability rating according to UL 94	V0
Housing material	PBT/PA-F

Mechanical properties

Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	1L-N/PE
Nominal voltage U_N	230 V AC ... 277 V AC
Nominal frequency f_N	50 Hz 60 Hz
Maximum continuous voltage U_C	335 V AC
Maximum continuous operating voltage U_C (L-N)	335 V AC
Maximum continuous operating voltage U_C (L-PEN)	335 V AC
Residual current I_{PE}	≤ 2.5 mA
Operating effective current I_C at U_N	≤ 2.5 mA
Nominal discharge current I_n (8/20) μ s	50 kA
Nominal discharge current I_n (8/20) μ s (L-N)	50 kA
Nominal discharge current I_n (8/20) μ s (L-PEN)	50 kA
Impulse discharge current (10/350) μ s, charge	25 As
Impulse discharge current (10/350) μ s, specific energy	625 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	50 kA
Follow current quenching capacity I_{fi} (L-N)	50 kA
Follow current quenching capacity I_{fi} (L-PEN)	50 kA
Voltage protection level U_p	≤ 0.9 kV
Voltage protection level U_p (L-N)	≤ 0.9 kV
Voltage protection level U_p (L-PEN)	≤ 0.9 kV
Response time t_A	≤ 100 ns
Response time t_A (L-N)	≤ 100 ns
Response time t_A (L-PEN)	≤ 100 ns
Max. backup fuse with branch wiring	250 A (gL)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Permissible humidity (operation)	≤ 95 %

Standards and regulations

Air clearances and creepage distances

Standards/regulations	VDE 0110-1 / IEC 60664-1 / VDE 0675-6 / NF C61-740
-----------------------	--

Standards

Standards/regulations	E DIN VDE 0675-6/A1
	UL 1449
	IEEE C62.1

Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

	IEEE C62.41
	IEC 61643-1
	prEN 61643-1
	NF C61-740
Standards/specifications	UL 1449
Standards/specifications	IEC 61643-1
Standards/specifications	NF C61-740

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


Combination type - FLT-PLUS CTRL-0.9/I

2818960


<https://www.phoenixcontact.com/in/products/2818960>

Drawings

Circuit diagram

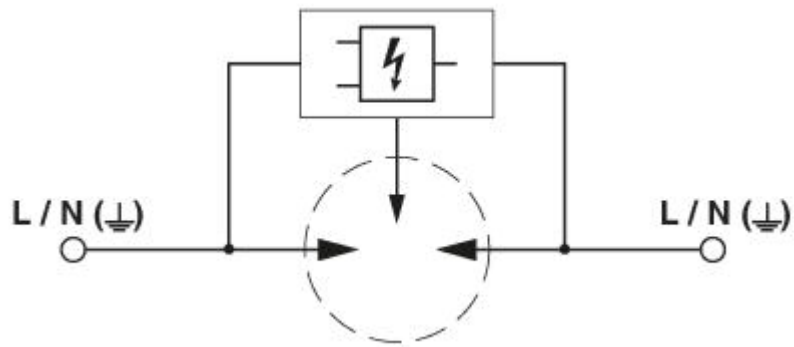

Dimensional drawing

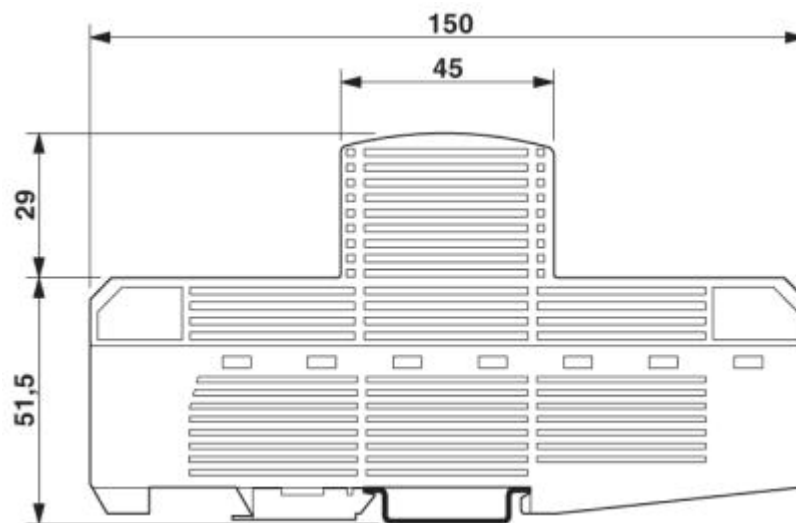

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>



Classifications

ECLASS

ECLASS-9.0	27130802
------------	----------

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

Accessories

Labeled device marker

Labeled device marker - ZBN 18,LGS:ERDE - 2749589



Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Labeled device marker

Labeled device marker - ZBN 18,LGS:L1-N,ERDE - 2749576



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Device marking

Device marking - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snap into tall marker groove, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

End block

End block - CLIPFIX 35 - 3022218

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



Bridge

Bridge - MPB 18/1-57 - 2809238

Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.



Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

Bridge

Bridge - MPB 18/1-12 - 2748593



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

Bridge

Bridge - MPB 18/1- 9 - 2748580



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

Bridge

Bridge - MPB 18/1- 8 - 2748577



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

Bridge

Bridge - MPB 18/1- 6 - 2748564



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

Combination type - FLT-PLUS CTRL-0.9/I

2818960

<https://www.phoenixcontact.com/in/products/2818960>

Bridge

Bridge - MPB 18/1- 4 - 2809225



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.

Bridge

Bridge - MPB 18/1- 3 - 2809212



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.

Combination type - FLT-PLUS CTRL-0.9/I



2818960

<https://www.phoenixcontact.com/in/products/2818960>

Bridge

Bridge - MPB 18/1- 2 - 2809209



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.

Phoenix Contact 2021 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in